

WATER HUNTERS!

We are proud to introduce Tesoro's most versatile and universal metal detector ever, the ALL NEW...



ONLY \$589.00
Lifetime Warranty

STINGRAY

GENERAL DESCRIPTION


The STINGRAY is a waterproof VLF/TR/VLF Discriminator, which provides three basic operating modes. It can be used as an ALL METAL detector, as a TR discriminator, or as a Motion based discriminator. It is capable of providing Mineral Free operation in any environment, if adjusted correctly.

The STINGRAY can be used on land, in the surf, or underwater to depths of 200 feet. It is perhaps the most versatile of all waterproof metal detectors yet made.

The detector is supplied in standard land based metal detector form, but is equipped with hooks for body mounting. It can be used as a pole mounted unit, body mounted or with the optional carrying case, as a belt mounted unit. Further, a shorter divers pole is optional, which compresses the detector to useable lengths for the diving TH'er.

The Stingray incorporates all of Tesoro's recent technical advancements including our renowned ED-120 discriminator but the range has been expanded even further and now reaches from the ALL METALS (lowest end) up through SCREW CAP (highest end), it gives complete control for compensation of wet salt beaches when used in the TR Disc. mode as well. Tesoro's exclusive monolithic shielding is used in both the control box and search coil to control outside interferences.

Unlike other waterproof detectors the Stingray offers both VLF and TR modes in the same instrument. Plus it is the only water detector that offers a no motion pin-point mode, manual ground balance and threshold adjustment making the Stingray the most advanced underwater metal detector available.

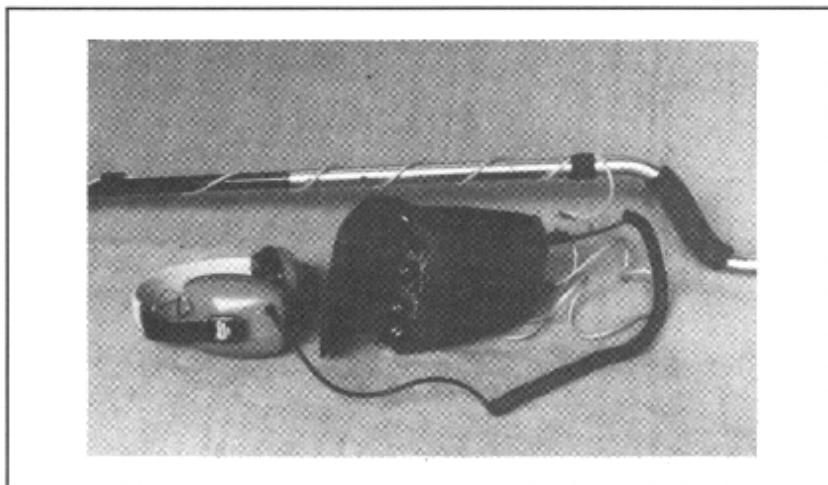

Optional divers pole and body mount pouch pictured above.

SPECIFICATIONS

Operating Frequency	10 KHz
Coil Size	8 Inch Diameter
Coil Type	Concentric
Audio Frequency	Approx 625 Hz
Audio Output	Piezo headphone
Weight	Approx. 4 1/4 lbs, including weighted coil and headphone
Battery Requirements	9 Volts DC 6 AA Alkalines
Battery Life	15-30 Hours
Optimum Temperature Range	30° F to 100° F
Optimum Humidity Range	0 to 75% RH
Operating Modes	VLF All Metal, TR Discriminate, VLF Discriminate

Tesoro Electronics, Inc., reserves the right to modify or improve the design without further notice.

YOUR NEAREST DEALER



TESORO ELECTRONICS, INC.
715 White Spar Road
Prescott, Arizona 86303
(602) 771-2646