


CONVERTIBLE

Body Mount or Pole Mount.
EVERYTHING INCLUDED!

Introducing the **GOLDEN Sabre**

SILENT SEARCH NOTCH DISCRIMINATOR

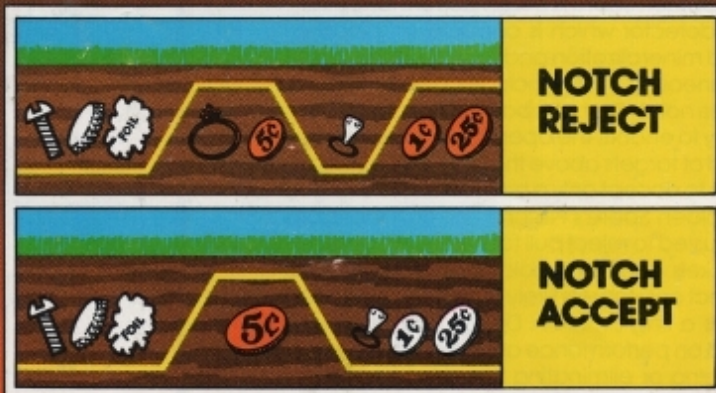

Now, enjoy the kind of performance you have dreamed about for years. Find nickels and small gold rings while rejecting most pull tabs by using *Notch Reject* discrimination. Or use *Notch Accept* to detect only a particular band of targets. Variable Notch Level, of course, plus standard discriminate and all metal modes.

Use as a 3½ pound pole mounted unit, or convert it in minutes to a body mount. No tools required, nothing extra to buy. Automatic battery test and ground rejection assure maximum performance. Eight inch open center coil for easy pin-pointing.

**Performance,
Features, Value...
...GOLDEN SABRE**

See your TESORO dealer soon.



The name that means Treasure!

\$399⁰⁰

WITH
Lifetime Warranty

Your Local Dealer is:

WASATCH TREASURE
426 N. Main - Ph. 774-1675
Clearfield, Utah 84015
(YOUR MULTILINE
METAL DETECTOR DEALER)

GOLDEN *Sabre* SILENT SEARCH NOTCH DISCRIMINATOR

GENERAL DESCRIPTION

The Golden Sabre is a high performance VLF metal detector which is capable of rejecting ground mineralization and buried metallic trash simultaneously. It also includes a separately variable notch filter as a part of its discriminate circuitry to enable the operator to either reject a band of targets above the regular discriminate level or to accept only a band of desired targets. The Golden Sabre's Notch Filter can therefore be adjusted to reject pull tabs while still detecting nickels and small gold rings, or can be set to detect only targets likely to be a desired item such as a ring or token. Design emphasis was placed on performance and ease of use, while minimizing or eliminating those troublesome adjustments that could cause a loss of performance if not used properly.

The operation of the detector is based on motion, regardless of whether the All Metal or Discriminate mode is selected. This means that the search coil must be moving slightly to detect a metallic target. The motion required is so slight that pin-pointing is very easy. The automatic ground rejection circuitry is set to allow operation in virtually any mineralization you might encounter, although operation may be difficult in black sand.


The Golden Sabre is furnished with an 8" open center concentric search coil. We feel that this coil will provide excellent performance in most situations. The open center greatly simplifies pin pointing.

The Golden Sabre can be assembled as a pole mounted arm rest unit, or as a body mount unit. It can be converted easily without tools.


CONTROLS:

- **POWER ON/OFF, SENSITIVITY**
Rotary control with switch.
- **DISCRIMINATE LEVEL**
Rotary control.
- **NOTCH FILTER ON/OFF, NOTCH LEVEL**
Rotary control with switch.
- **SEARCH MODE SWITCH**
Selects All Metal or Discriminate modes.
- **NOTCH MODE SWITCH**
Selects Reject or Accept functions.

Pole Mount

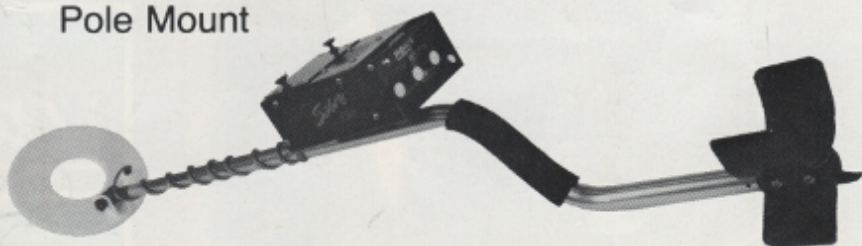

Body Mount

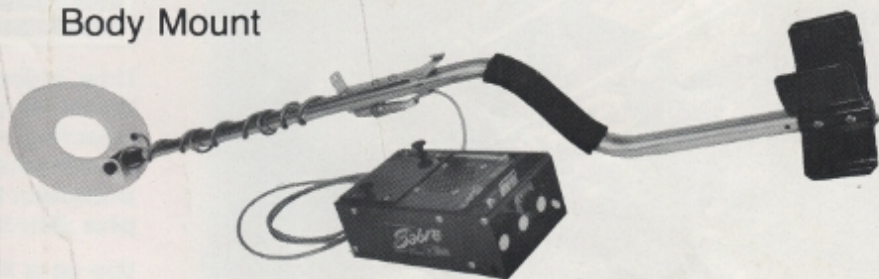

SPECIFICATIONS

Operating Frequency	12 KHz
Coil Size	8" Diameter
Coil Type	Concentric
Audio Frequency	Approx. 375 Hz
Audio Output	2 1/4" speaker and 1/4" stereo earphone jack
Weight	Approx. 3 1/2 pounds
Battery Requirements	12 volts DC (8 AA penlight batteries)
Battery Life	15-30 hours
Optimum Temperature Range	30° F to 100° F
Optimum Humidity Range	0 to 75% R.H.
Operating Modes	All Metal Discriminate Notch Reject Discriminate Notch Accept Discriminate

TESORO Electronics, Inc. reserves the right to modify or improve the design without further notice.



TESORO ELECTRONICS, INC.
3116 West Thomas Road #606
Phoenix, Arizona 85017
(602) 272-2586